



115 V / 60 Hz

# Product Catalog

Price List





WITH OVER 700+ PRODUCTS

# Leader of Professional Refrigeration

[www.frenox.com](http://www.frenox.com)



# INDEX

- 1** Bottom Mounted Refrigerator & Freezer 80
- 3** Bottom Mounted Refrigerator & Freezer 70
- 5** Vertical Refrigerator & Freezer
- 7** Counter Refrigerator & Freezer
- 9** Chef Bases Refrigerators
- 11** Chef Bases Freezers
- 13** Pizza Refrigerators
- 15** Pizza Prep Table
- 17** Cocktail Refrigerator
- 19** Dry Age Series
- 21** Bottle Coolers
- 23** KEG Coolers
- 25** Undercounter Refrigerators & Freezers 60
- 27** Undercounter Refrigerators & Freezers 70
- 29** Modular Cold Room Panels



# BOTTOM MOUNTED REFRIGERATOR & FREEZER 80

## INFO

Easy service access:  
Direct access to the cooling unit shortens maintenance time.

Maximized storage space:  
Upper area fully dedicated to product storage.

Energy efficiency:  
Optimized air circulation and stable cooling performance.

Professional use:  
Stainless steel body, hygienic interior, and durable structure.

Eco-friendly R290 refrigerant gas for sustainable operation.




Intertek




Intertek

Dimension Details:

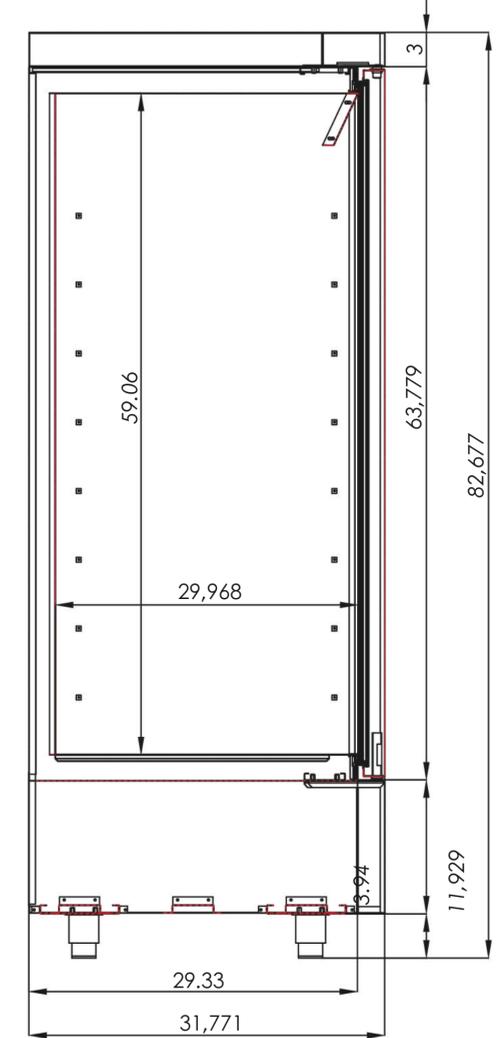

frenox.com

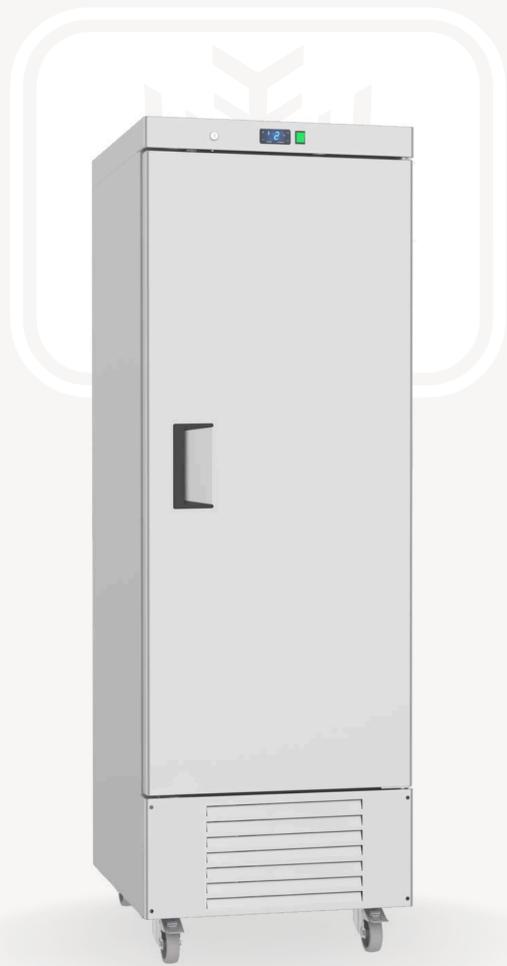

NEW!

## BN7-BM-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41 °F (-2 / +8 °C)                            |
| Volume            | 24.72 ft <sup>3</sup> (700 L)                        |
| Ext. Dim. (W×D×H) | 27.61 × 31.77 × 82.68 in<br>(70.15 × 80.7 × 210 cm)  |
| Int. Dim. (W×D×H) | 22.89 × 27.02 × 53.15 in<br>(58.15 × 68.65 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 3  |
| Shelf Size (W×D)  | 22.05 × 25.28 in<br>(560 × 642 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 809**



NEW!

## BN14-BM-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41 °F (-2 / +8 °C)                            |
| Volume            | 49.44 ft <sup>3</sup> (1400 L)                       |
| Ext. Dim. (W×D×H) | 55.24 × 31.77 × 82.68 in<br>(140.3 × 80.7 × 210 cm)  |
| Int. Dim. (W×D×H) | 50.51 × 27.02 × 53.15 in<br>(128.3 × 68.65 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 6  |
| Shelf Size (W×D)  | 22.05 × 25.28 in<br>(560 × 642 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 1181**



Freezer

NEW!

## BL7-BM-US

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                            |
| Volume            | 24.72 ft <sup>3</sup> (700 L)                        |
| Ext. Dim. (W×D×H) | 27.61 × 31.77 × 82.68 in<br>(70.15 × 80.7 × 210 cm)  |
| Int. Dim. (W×D×H) | 22.89 × 27.02 × 53.15 in<br>(58.15 × 68.65 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 3  |
| Shelf Size (W×D)  | 22.05 × 25.28 in<br>(560 × 642 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 945**



Freezer

NEW!

## BL14-BM-US

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                            |
| Volume            | 49.44 ft <sup>3</sup> (1400 L)                       |
| Ext. Dim. (W×D×H) | 55.24 × 31.77 × 82.68 in<br>(140.3 × 80.7 × 210 cm)  |
| Int. Dim. (W×D×H) | 50.51 × 27.02 × 53.15 in<br>(128.3 × 68.65 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 6  |
| Shelf Size (W×D)  | 22.05 × 25.28 in<br>(560 × 642 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 1365**



# BOTTOM MOUNTED REFRIGERATOR & FREEZER 70

## INFO

Easy service access:  
Direct access to the cooling unit shortens maintenance time.

Maximized storage space:  
Upper area fully dedicated to product storage.

Energy efficiency:  
Optimized air circulation and stable cooling performance.

Professional use:  
Stainless steel body, hygienic interior, and durable structure.

Eco-friendly R290 refrigerant gas for sustainable operation.




Intertek




Intertek

Dimension Details:

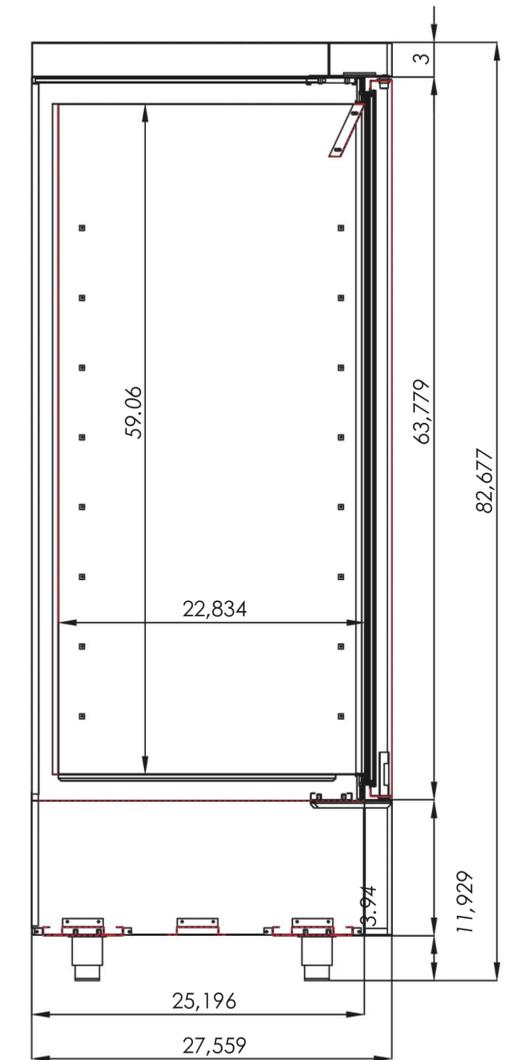

frenox.com

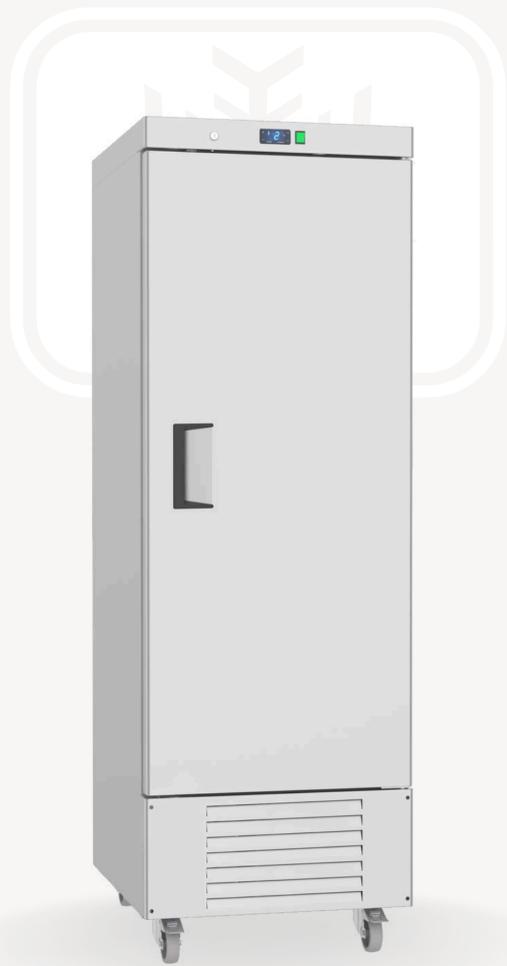


NEW!

## BN6-BM-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41°F (-2 / +8 °C)                             |
| Volume            | 19.42 ft <sup>3</sup> (550 L)                        |
| Ext. Dim. (W×D×H) | 27.61 × 27.56 × 82.68 in<br>(70.15 × 70 × 210 cm)    |
| Int. Dim. (W×D×H) | 22.89 × 22.82 × 53.15 in<br>(58.15 × 57.95 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 3  |
| Shelf Size (W×D)  | 22.05 × 21.34 in<br>(560 × 542 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 809**

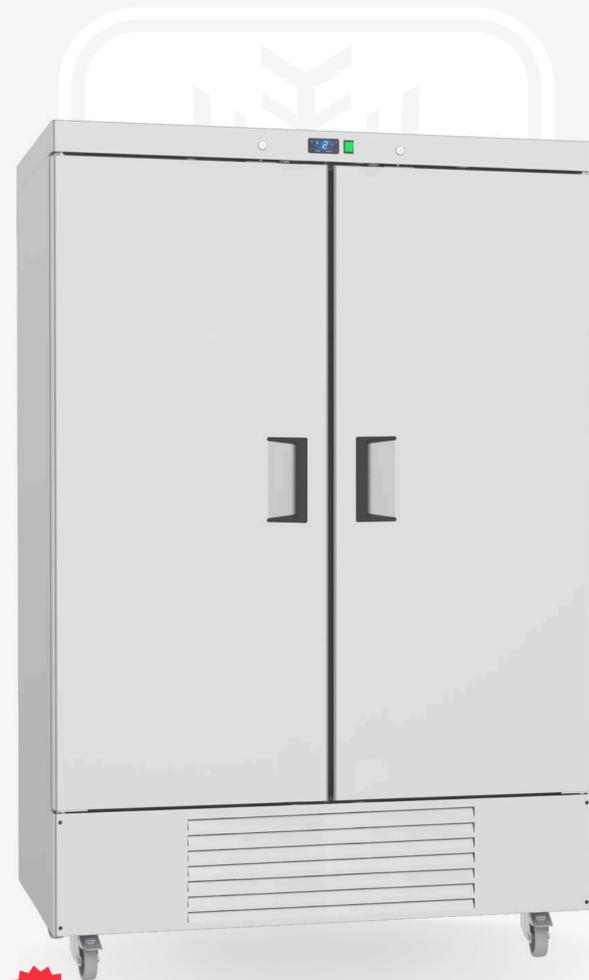

NEW!

## BN12-BM-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41°F (-2 / +8 °C)                             |
| Volume            | 42.38 ft <sup>3</sup> (1200 L)                       |
| Ext. Dim. (W×D×H) | 55.24 × 27.56 × 82.68 in<br>(140.3 × 70 × 210 cm)    |
| Int. Dim. (W×D×H) | 50.51 × 22.82 × 53.15 in<br>(128.3 × 57.95 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 6  |
| Shelf Size (W×D)  | 22.05 × 21.34 in<br>(560 × 542 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 1181**



Freezer

NEW!

## BL6-BM

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                            |
| Volume            | 19.42 ft <sup>3</sup> (550 L)                        |
| Ext. Dim. (W×D×H) | 27.61 × 27.56 × 82.68 in<br>(70.15 × 70 × 210 cm)    |
| Int. Dim. (W×D×H) | 22.89 × 22.82 × 53.15 in<br>(58.15 × 57.95 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 3  |
| Shelf Size (W×D)  | 22.05 × 21.34 in<br>(560 × 542 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 945**



Freezer

NEW!

## BL12-BM-US

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                            |
| Volume            | 42.38 ft <sup>3</sup> (1200 L)                       |
| Ext. Dim. (W×D×H) | 55.24 × 27.56 × 82.68 in<br>(140.3 × 70 × 210 cm)    |
| Int. Dim. (W×D×H) | 50.51 × 22.82 × 53.15 in<br>(128.3 × 57.95 × 135 cm) |
| SS Type           | 430  |
| Insul. Thick.     | 2.36 in (60 mm)                                      |
| Shelves           | 6  |
| Shelf Size (W×D)  | 22.05 × 21.34 in<br>(560 × 542 mm)                   |
| Cooling Gas       | R290   |
| Cooling Unit      | Bottom Mounted (BM)                                  |
| Voltage           | 115V / 60Hz / 1Ph                                    |

**\$ 1365**

# VERTICAL REFRIGERATOR & FREEZER

## INFO

Provides high energy efficiency with 3.35 in (85 mm) insulation thickness.

Ensures easy service and low operating cost with monoblock cooling unit.

Built-in shelving design offers durability and ease of use.

Stainless steel body and hygienic interior, ideal for professional kitchens.

Uses eco-friendly R290 refrigerant gas.




### MonoBlock Independent Cooling Group



**Built-in shelving system, durable and easy to clean.**

### Dimension Details:

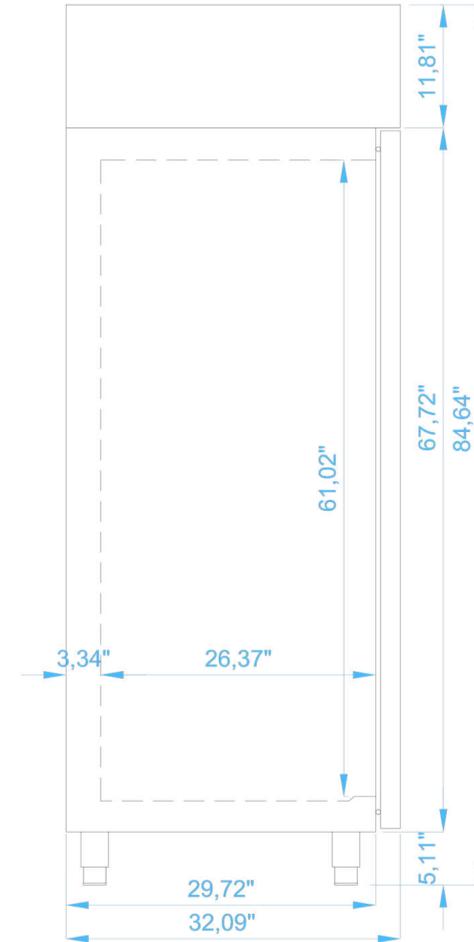




## VN9-M-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41 °F (0 / +5 °C)                       |
| Gross Volume      | 24.7 ft <sup>3</sup> (700 L)                   |
| Ext. Dim. (W×D×H) | 27.56 x 31.89 x 80.71 in<br>(70 x 81 x 205 cm) |
| Pack. Dim.        | 31.50 x 33.46 x 86.61 in<br>(80 x 85 x 220 cm) |
| Weight            | 304 lbs (138 kg)                               |
| SS Type           | 304  |
| Insul. Thick.     | 3.35 in (85 mm)                                |
| Shelves           | 3  |
| Shelf Size (W×D)  | 25.59 x 21.14 in<br>(650 x 537 mm, GN 2/1)     |
| Doors             | 1  |
| Cooling Gas       | R290   |
| Voltage           | 115V / 60Hz / 1Ph                              |

**\$ 1188**

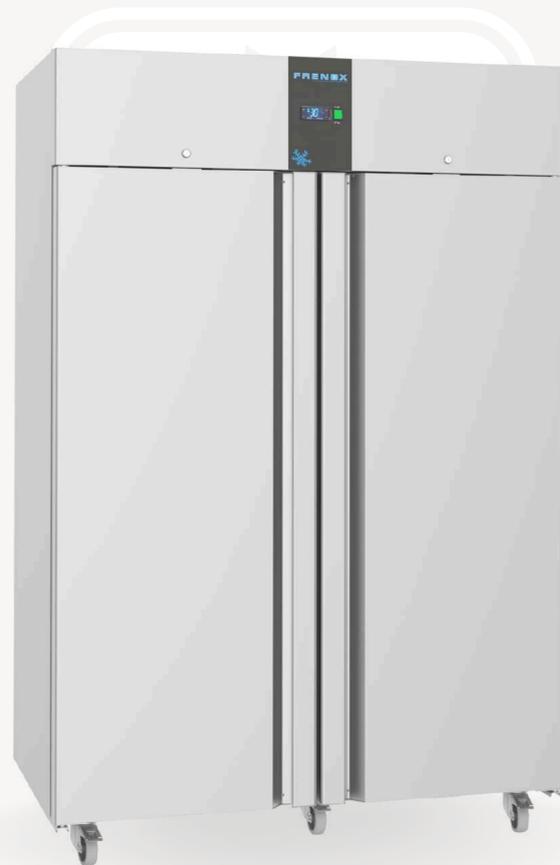

## VN18-M-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                        |
| Gross Volume      | 49.4 ft <sup>3</sup> (1400 L)                   |
| Ext. Dim. (W×D×H) | 55.24 x 31.89 x 80.71 in<br>(140 x 81 x 205 cm) |
| Pack. Dim.        | 59.06 x 33.46 x 86.61 in<br>(150 x 85 x 220 cm) |
| Weight            | 584 lbs (265 kg)                                |
| SS Type           | 304   |
| Insul. Thick.     | 3.35 in (85 mm)                                 |
| Shelves           | 6   |
| Shelf Size (W×D)  | 21.85 x 21.14 in<br>(555 x 537 mm, GN 2/1)      |
| Doors             | 2   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                               |

**\$ 1735**



## VL9-M-US

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                      |
| Gross Volume      | 24.7 ft <sup>3</sup> (700 L)                   |
| Ext. Dim. (W×D×H) | 27.56 x 31.89 x 80.71 in<br>(70 x 81 x 205 cm) |
| Pack. Dim.        | 31.50 x 33.46 x 86.61 in<br>(80 x 85 x 220 cm) |
| Weight            | 350 lbs (159 kg)                               |
| SS Type           | 304  |
| Insul. Thick.     | 3.35 in (85 mm)                                |
| Shelves           | 3  |
| Shelf Size (W×D)  | 25.59 x 21.14 in<br>(650 x 537 mm, GN 2/1)     |
| Doors             | 1  |
| Cooling Gas       | R290   |
| Voltage           | 115V / 60Hz / 1Ph                              |

**\$ 1493**



## VL18-M-US

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                       |
| Gross Volume      | 49.4 ft <sup>3</sup> (1400 L)                   |
| Ext. Dim. (W×D×H) | 55.24 x 31.89 x 80.71 in<br>(140 x 81 x 205 cm) |
| Pack. Dim.        | 59.06 x 33.46 x 86.61 in<br>(150 x 85 x 220 cm) |
| Weight            | 595 lbs (270 kg)                                |
| SS Type           | 304   |
| Insul. Thick.     | 3.35 in (85 mm)                                 |
| Shelves           | 6   |
| Shelf Size (W×D)  | 25.59 x 21.14 in<br>(650 x 537 mm, GN 2/1)      |
| Doors             | 2   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                               |

**\$ 1946**

# COUNTER REFRIGERATOR & FREEZER

## INFO

Frenox PMS series horizontal refrigerators and freezers are engineered to deliver maximum efficiency and durability in professional kitchen environments.

Featuring shelf size of 18 x 26 in (40x66 cm), with a capacity of 8 shelves and 2.36 in (6 cm) shelf spacing, they provide flexible and well-organized storage for various food types.


The special self-closing spring hinge ensures smooth and energy-efficient door operation during frequent use. Cleanable gaskets maintain superior hygiene, while the adjustable shelf system allows users to optimize the interior layout for different storage needs.

Built with a durable stainless-steel structure, high-density insulation, and eco-friendly R290 refrigerant, the PMS series stands out for its reliability, energy efficiency, and modern design – making it a trusted choice for professional kitchens worldwide.



**SPECIAL SELF-CLOSING SPRING HINGE, CLEANABLE GASKET, ADJUSTABLE SHELF SYSTEM.**

### Dimension Details:

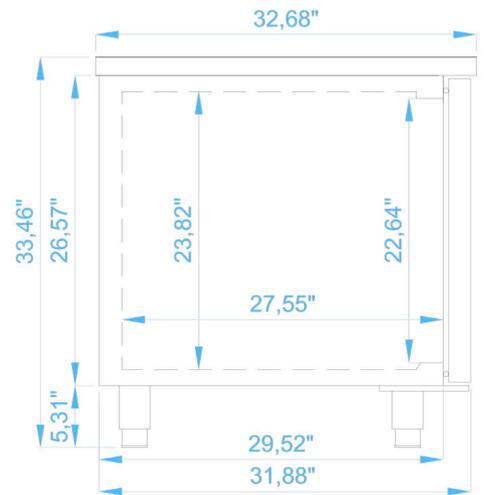

**FITS 18x26 in. CAPACITY OF UP TO 8 SHELVES**

### Drawer Options:

|             |             |        |
|-------------|-------------|--------|
| <b>2D</b>   | 1/2 Drawers | \$ 170 |
| <b>3D</b>   | 1/3 Drawers | \$ 210 |
| <b>2/3D</b> | 2/3 Drawers | \$ 190 |




frenox.com



## PN164-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                    |
| Gross Volume      | 16.25 ft <sup>3</sup> (460 L)               |
| Ext. Dim. (W×D×H) | 64.57 x 32.68 x 33.46 in (164 x 83 x 85 cm) |
| Pack. Dim.        | 66.54 x 34.65 x 37.40 in (169 x 88 x 95 cm) |
| Weight            | 331 lbs(150 kg)                             |
| SS Type           | 304   |
| Insul. Thick.     | 1.97 in (50 mm)                             |
| Shelves           | 2   |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm)               |
| Doors             | 2   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |


**\$1050**

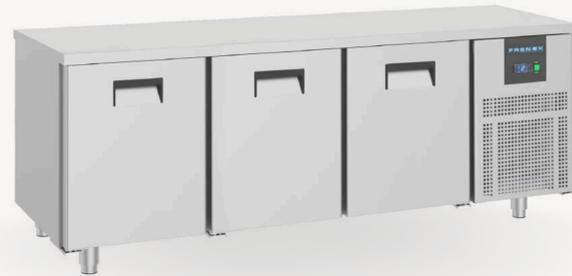

## PN223-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                    |
| Gross Volume      | 25.43 ft <sup>3</sup> (720 L)               |
| Ext. Dim. (W×D×H) | 87.80 x 32.68 x 33.46 in (223 x 83 x 85 cm) |
| Pack. Dim.        | 91.73 x 34.65 x 37.40 in (233 x 88 x 95 cm) |
| Weight            | 396.83 lbs(180 kg)                          |
| SS Type           | 304   |
| Insul. Thick.     | 1.97 in (50 mm)                             |
| Shelves           | 3   |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm)               |
| Doors             | 3   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |


**\$1260**

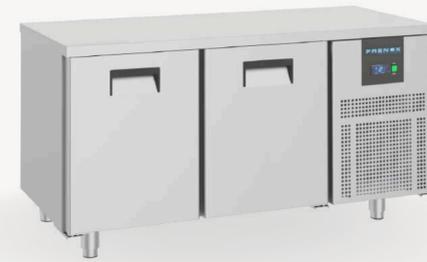

## PL164-US

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                   |
| Gross Volume      | 16.25 ft <sup>3</sup> (460 L)               |
| Ext. Dim. (W×D×H) | 64.57 x 32.68 x 33.46 in (164 x 83 x 85 cm) |
| Pack. Dim.        | 66.54 x 34.65 x 37.40 in (169 x 88 x 95 cm) |
| Weight            | 331 lbs(150 kg)                             |
| SS Type           | 304   |
| Insul. Thick.     | 1.97 in (50 mm)                             |
| Shelves           | 2   |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm)               |
| Doors             | 2   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$1162**

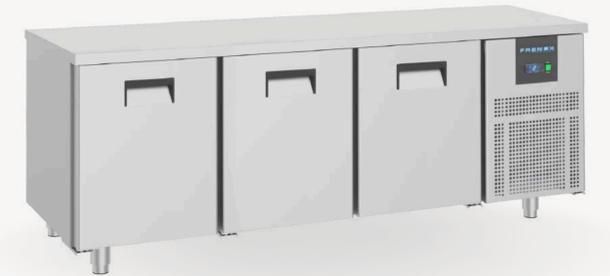

## PL223-US

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                   |
| Gross Volume      | 25.43 ft <sup>3</sup> (720 L)               |
| Ext. Dim. (W×D×H) | 87.80 x 32.68 x 33.46 in (223 x 83 x 85 cm) |
| Pack. Dim.        | 91.73 x 34.65 x 37.40 in (233 x 88 x 95 cm) |
| Weight            | 396.83 lbs(180 kg)                          |
| SS Type           | 304   |
| Insul. Thick.     | 1.97 in (50 mm)                             |
| Shelves           | 3   |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm)               |
| Doors             | 3   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$1321**





# CHEF BASES REFRIGERATORS

## INFO

Frenox CBN Chef Base refrigerators combine powerful cooling with a sturdy base for cooking equipment. Using R290 natural refrigerant and operating on 115V / 60Hz / 1Ph, they provide efficient and eco-friendly performance.

With 1.96 in (50 mm) insulation, they ensure energy savings and reliable cooling in the range of 29 / 47 °F (-2 / +8 °C). Hygiene-focused design includes a removable water tray, magnetic gaskets, and an easy-to-clean stainless steel body.

Available with 2 or 4 drawers, fully compatible with GN pans, the CBN series comes standard with a digital control panel, automatic defrost system, and adjustable stainless steel legs, making it a durable solution for professional kitchens.

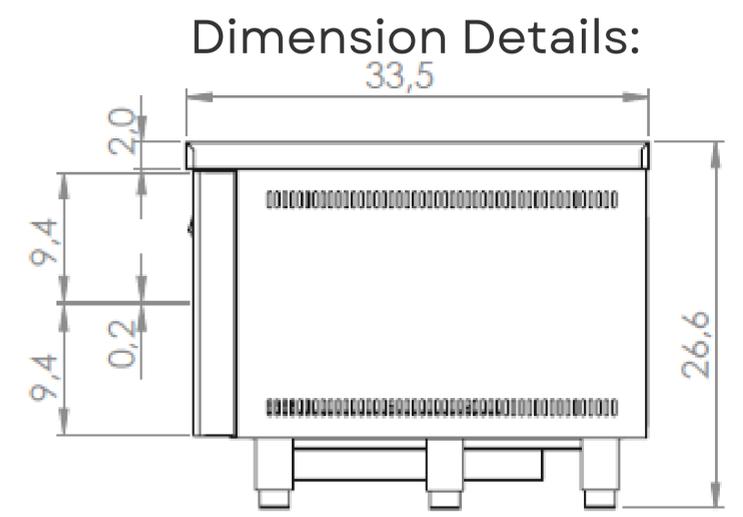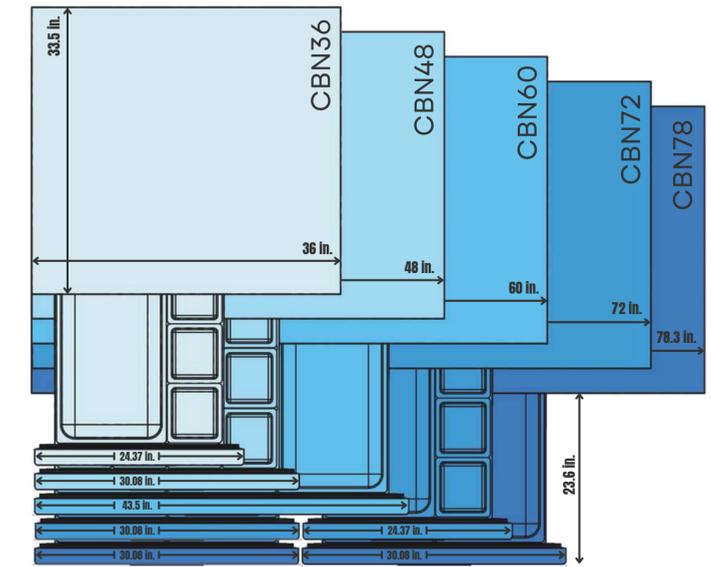



**NEW!** **CBN36**

|                          |  |
|--------------------------|--|
| <b>Temperature</b>       | +33 / +41°F (0 / +5 °C)                  |
| <b>Volume</b>            | 4.8 ft <sup>3</sup> (136 L)              |
| <b>Ext. Dim. (W×D×H)</b> | 36 × 33.5 × 26.6 in (914 × 840 × 676 mm) |
| <b>Int. Dim. (W×D×H)</b> | 36 × 35 × 31 in (914 × 889 × 787 mm)     |
| <b>SS Type</b>           | 304                                      |
| <b>Insul. Thick.</b>     | 1.96 in (50 mm)                          |
| <b>Drawers</b>           | 2  |
| <b>GN Capacity</b>       | GN 1/1: 2 pcs,<br>GN 1/6: 6 pcs          |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                        |

**\$ 942**



**NEW!** **CBN48**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41°F (0 / +5 °C)                   |
| <b>Volume</b>            | 6.28 ft <sup>3</sup> (178 L)              |
| <b>Ext. Dim. (W×D×H)</b> | 48 × 33.5 × 26.6 in (1219 × 840 × 676 mm) |
| <b>Int. Dim. (W×D×H)</b> | 49 × 35 × 31 in (1245 × 889 × 787 mm)     |
| <b>SS Type</b>           | 304                                       |
| <b>Insul. Thick.</b>     | 1.96 in (50 mm)                           |
| <b>Drawers</b>           | 2   |
| <b>GN Capacity</b>       | GN 1/1: 4 pcs                             |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                         |


**\$ 1016**



**NEW!** **CBN60**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41°F (0 / +5 °C)                   |
| <b>Volume</b>            | 9.18 ft <sup>3</sup> (260 L)              |
| <b>Ext. Dim. (W×D×H)</b> | 60 × 33.5 × 26.6 in (1524 × 840 × 676 mm) |
| <b>Int. Dim. (W×D×H)</b> | 61 × 35 × 31 in (1549 × 889 × 787 mm)     |
| <b>SS Type</b>           | 304                                       |
| <b>Insul. Thick.</b>     | 1.96 in (50 mm)                           |
| <b>Drawers</b>           | 2   |
| <b>GN Capacity</b>       | GN 1/1: 2 pcs,<br>GN 2/1: 2 pcs           |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                         |

**\$ 1127**

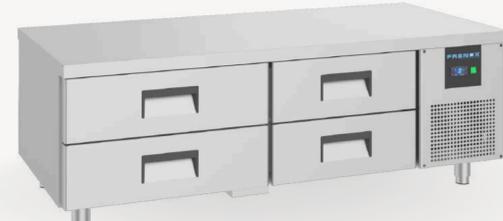

**NEW!** **CBN72**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41°F (0 / +5 °C)                   |
| <b>Volume</b>            | 12.00 ft <sup>3</sup> (340 L)             |
| <b>Ext. Dim. (W×D×H)</b> | 72 × 33.5 × 26.6 in (1829 × 840 × 676 mm) |
| <b>Int. Dim. (W×D×H)</b> | 72 × 35 × 31 in (1829 × 889 × 787 mm)     |
| <b>SS Type</b>           | 304                                       |
| <b>Insul. Thick.</b>     | 1.96 in (50 mm)                           |
| <b>Drawers</b>           | 4   |
| <b>GN Capacity</b>       | GN 1/1: 6 pcs,<br>GN 1/6: 6 pcs           |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                         |

**\$ 1424**



**NEW!** **CBN78**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41°F (0 / +5 °C)                     |
| <b>Volume</b>            | 13.41 ft <sup>3</sup> (380 L)               |
| <b>Ext. Dim. (W×D×H)</b> | 78.3 × 33.5 × 26.6 in (1989 × 840 × 676 mm) |
| <b>Int. Dim. (W×D×H)</b> | 80 × 35 × 31 in (2032 × 889 × 787 mm)       |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.96 in (50 mm)                             |
| <b>Drawers</b>           | 4   |
| <b>GN Capacity</b>       | GN 1/1: 8 pcs                               |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

**\$ 1451**





# CHEF BASES FREEZERS

## INFO

Frenox CBL Chef Base freezers combine deep-freezing performance with a durable base for cooking equipment. Powered by R290 natural refrigerant and 115V / 60Hz / 1Ph, they deliver reliable and eco-friendly operation.

With 1.96 in (50 mm) insulation, they ensure energy savings and stable freezing in the range of -10 / 0 °F (-23 / -18 °C). Hygiene-oriented design features a removable water tray, magnetic gaskets, and an easy-to-clean stainless steel construction.

Available with 2 or 4 drawers, fully compatible with GN pans, the CBL series comes equipped with a digital control panel, automatic defrost system, and adjustable stainless steel legs, making them a robust and practical solution for professional kitchens.

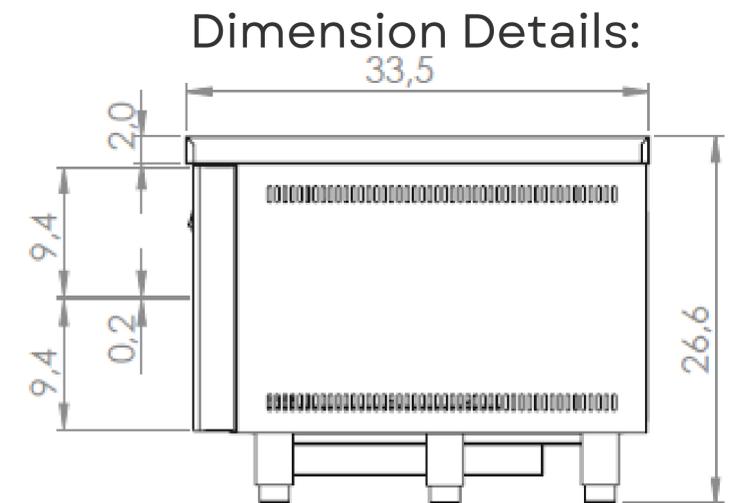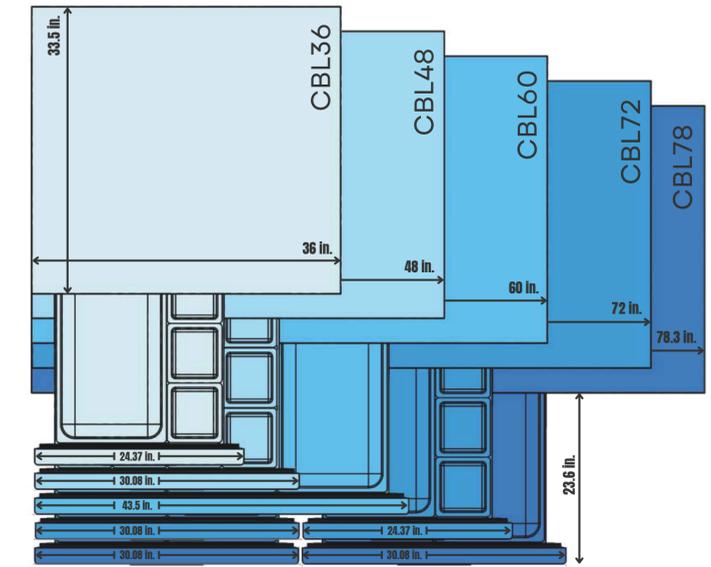



Freezer



**NEW! CBL36**

|                   |  |
|-------------------|--|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                |
| Volume            | 4.8 ft <sup>3</sup> (136 L)              |
| Ext. Dim. (W×D×H) | 36 × 33.5 × 26.6 in (914 × 840 × 676 mm) |
| Int. Dim. (W×D×H) | 36 × 35 × 31 in (914 × 889 × 787 mm)     |
| SS Type           | 304                                      |
| Insul. Thick.     | 1.96 in (50 mm)                          |
| Drawers           | 2  |
| GN Capacity       | GN 1/1: 2 pcs, GN 1/6: 6 pcs             |
| Voltage           | 115V / 60Hz / 1Ph                        |

**\$ 940**



Freezer



**NEW! CBL48**

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                 |
| Volume            | 6.28 ft <sup>3</sup> (178 L)              |
| Ext. Dim. (W×D×H) | 48 × 33.5 × 26.6 in (1219 × 840 × 676 mm) |
| Int. Dim. (W×D×H) | 49 × 35 × 31 in (1245 × 889 × 787 mm)     |
| SS Type           | 304                                       |
| Insul. Thick.     | 1.96 in (50 mm)                           |
| Drawers           | 2   |
| GN Capacity       | GN 1/1: 4 pcs                             |
| Voltage           | 115V / 60Hz / 1Ph                         |

**\$ 1018**



Freezer




**NEW! CBL60**

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                 |
| Volume            | 9.18 ft <sup>3</sup> (260 L)              |
| Ext. Dim. (W×D×H) | 60 × 33.5 × 26.6 in (1524 × 840 × 676 mm) |
| Int. Dim. (W×D×H) | 61 × 35 × 31 in (1549 × 889 × 787 mm)     |
| SS Type           | 304                                       |
| Insul. Thick.     | 1.96 in (50 mm)                           |
| Drawers           | 2   |
| GN Capacity       | GN 1/1: 2 pcs, GN 2/1: 2 pcs              |
| Voltage           | 115V / 60Hz / 1Ph                         |

**\$ 1130**



Freezer

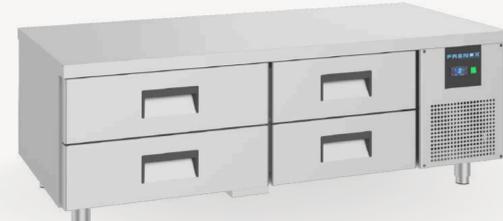

**NEW! CBL72**

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                 |
| Volume            | 12.00 ft <sup>3</sup> (340 L)             |
| Ext. Dim. (W×D×H) | 72 × 33.5 × 26.6 in (1829 × 840 × 676 mm) |
| Int. Dim. (W×D×H) | 72 × 35 × 31 in (1829 × 889 × 787 mm)     |
| SS Type           | 304                                       |
| Insul. Thick.     | 1.96 in (50 mm)                           |
| Drawers           | 4   |
| GN Capacity       | GN 1/1: 6 pcs, GN 1/6: 6 pcs              |
| Voltage           | 115V / 60Hz / 1Ph                         |

**\$ 1428**



Freezer



**NEW! CBL78**

|                   |   |
|-------------------|---|
| Temperature       | -10 / 0 °F (-23 / -18 °C)                   |
| Volume            | 13.41 ft <sup>3</sup> (380 L)               |
| Ext. Dim. (W×D×H) | 78.3 × 33.5 × 26.6 in (1989 × 840 × 676 mm) |
| Int. Dim. (W×D×H) | 80 × 35 × 31 in (2032 × 889 × 787 mm)       |
| SS Type           | 304   |
| Insul. Thick.     | 1.96 in (50 mm)                             |
| Drawers           | 4   |
| GN Capacity       | GN 1/1: 8 pcs                               |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$ 1454**



# PIZZA REFRIGERATORS




**GN 1/3**  
13x7 in



**For Fast Food Make-Up**

Dimension Details:

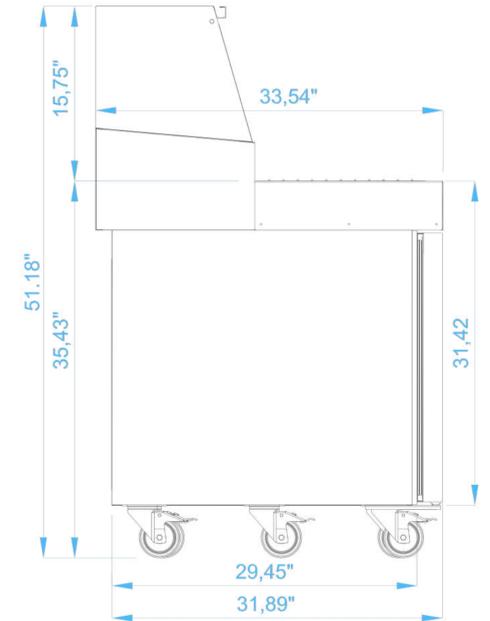

## INFO

Frenox 46x66 pizza refrigerators are designed for maximum efficiency in busy professional kitchens. With an interior depth of 24.8 in (63 cm), they accommodate full 18 x 26 in (40x66 cm) trays while keeping ingredients fresh and ready. A powerful canopy fan ensures even cooling, while the automatic defrost system maintains reliable performance.

Built with durable stainless steel, height-adjustable legs, and a removable magnetic gasket, these refrigerators combine hygiene with convenience. High-density polyurethane insulation guarantees energy savings, and models are available with 6 or 9 shelf rails for flexible storage.

With capacities of 16.2 ft<sup>3</sup> (460 L) and 25.4 ft<sup>3</sup> (720 L), Frenox delivers the ideal solution for pizzerias seeking durability, efficiency, and functionality in one unit.



**FITS 18x26 in. CAPACITY OF UP TO 8 SHELVES**



### Drawer Options:

|             |             |        |
|-------------|-------------|--------|
| <b>2D</b>   | 1/2 Drawers | \$ 170 |
| <b>3D</b>   | 1/3 Drawers | \$ 210 |
| <b>2/3D</b> | 2/3 Drawers | \$ 190 |



frenox.com



## PIZ178-US

|                              |   |
|------------------------------|---|
| <b>Temperature</b>           | +33 / +41 °F (0 / +5 °C)                          |
| <b>Volume</b>                | 16.25 ft <sup>3</sup> (460 L)                     |
| <b>Ext. Dim. (W×D×H)</b>     | 70.08 x 34.84 x 40.16 in<br>(178 x 89 x 102 cm)   |
| <b>Pack. Dim.</b>            | 73.23 x 36.02 x 50.00 in<br>(186 x 91.5 x 127 cm) |
| <b>Weight</b>                | 569 lbs (258 kg)                                  |
| <b>SS Type</b>               | 304   |
| <b>Insul. Thick.</b>         | 1.97 in (50 mm)                                   |
| <b>1/3 Size Pan Capacity</b> | 9   |
| <b>Shelf Rails Pair</b>      | 6   |
| <b>Shelf Size (W×D)</b>      | 18.11 x 25.98 in (46 x 66 cm)                     |
| <b>Cooling Gas</b>           | R290  |
| <b>Voltage</b>               | 115V / 60Hz / 1Ph                                 |

**\$2777**



## PIZ237-US

|                              |   |
|------------------------------|---|
| <b>Temperature</b>           | +33 / +41 °F (0 / +5 °C)                          |
| <b>Volume</b>                | 25.4 ft <sup>3</sup> (720 L)                      |
| <b>Ext. Dim. (W×D×H)</b>     | 93.31 x 34.84 x 40.16 in<br>(237 x 89 x 102 cm)   |
| <b>Pack. Dim.</b>            | 96.46 x 36.02 x 50.00 in<br>(245 x 91.5 x 127 cm) |
| <b>Weight</b>                | 789 lbs (358 kg)                                  |
| <b>SS Type</b>               | 304   |
| <b>Insul. Thick.</b>         | 1.97 in (50 mm)                                   |
| <b>1/3 Size Pan Capacity</b> | 13  |
| <b>Shelf Rails Pair</b>      | 9   |
| <b>Shelf Size (W×D)</b>      | 18.11 x 25.98 in (46 x 66 cm)                     |
| <b>Cooling Gas</b>           | R290  |
| <b>Voltage</b>               | 115V / 60Hz / 1Ph                                 |

**\$3199**



# PIZZA PREP TABLE INFO

Frenox PMS series pizza prep tables are designed to deliver speed, hygiene, and efficiency in professional kitchens. With a spacious stainless-steel worktop and GN-compatible pan storage, they keep all fresh ingredients within easy reach while ensuring optimal cooling performance.


Equipped with a powerful fan cooling system and automatic defrost, these units guarantee reliable operation even in high-demand environments. High-density polyurethane insulation ensures energy savings, while digital control panels allow precise temperature adjustment.

The ergonomic design accelerates workflow, while optional drawer systems and height-adjustable stainless-steel legs provide flexibility for different kitchen setups. Easy-to-clean magnetic gaskets and durable construction make PMS prep tables a long-lasting and hygienic solution.


Combining durability, hygiene, and practicality, Frenox PMS pizza prep tables are the perfect choice for pizzerias seeking seamless preparation and storage in one station.



13x7 in

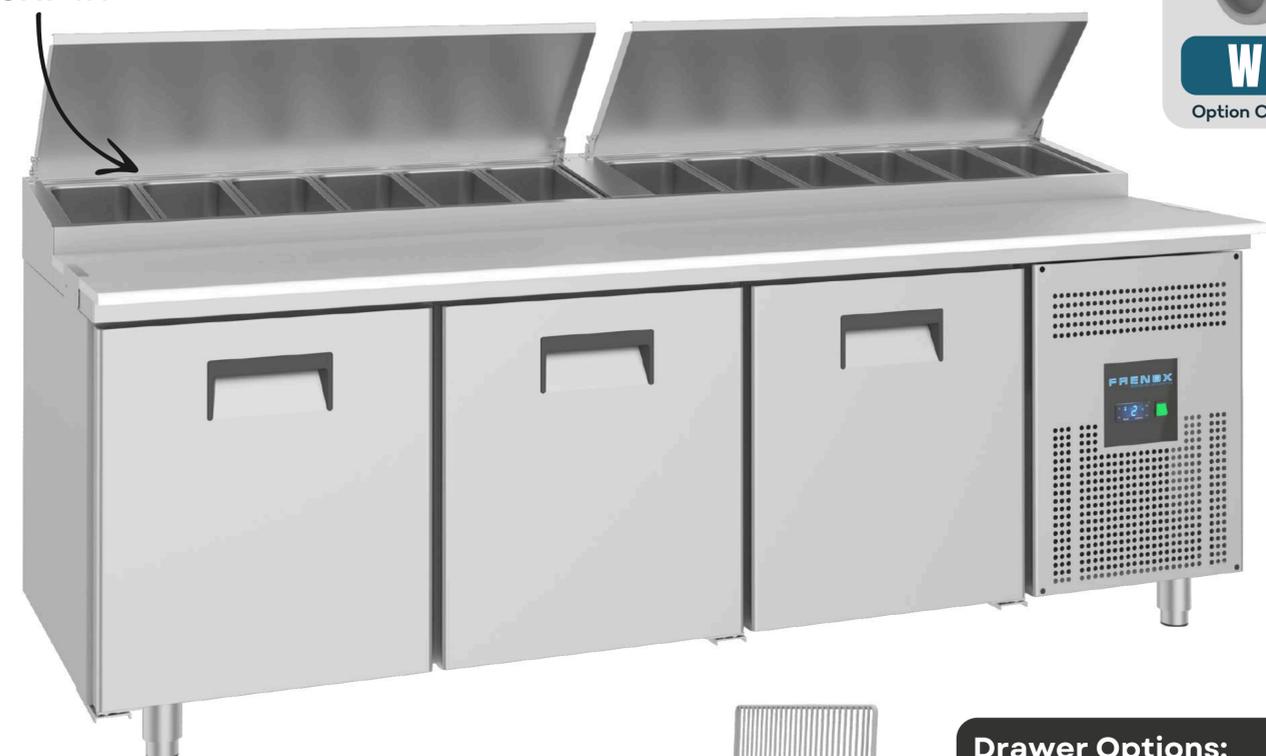

Dimension Details:

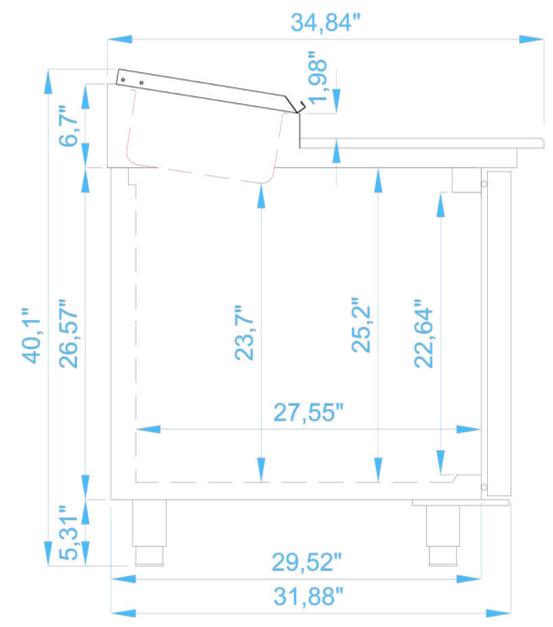


FITS 18x26 in.  
CAPACITY OF UP  
TO 8 SHELVES



**Drawer Options:**

|             |             |        |
|-------------|-------------|--------|
| <b>2D</b>   | 1/2 Drawers | \$ 170 |
| <b>3D</b>   | 1/3 Drawers | \$ 210 |
| <b>2/3D</b> | 2/3 Drawers | \$ 190 |

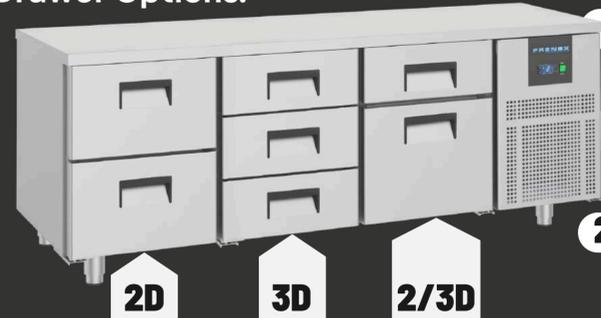




## PMS164-US

|                              |   |
|------------------------------|---|
| <b>Temperature</b>           | +33 / +41 °F (0 / +5 °C)                        |
| <b>Gross Volume</b>          | 16.24 ft <sup>3</sup> (460 L)                   |
| <b>Ext. Dim. (W×D×H)</b>     | 67.13 × 34.84 × 40.1 in<br>(171 × 89 × 103 cm)  |
| <b>Pack. Dim. (W×D×H)</b>    | 68.50 × 36.61 × 41.34 in<br>(175 × 94 × 106 cm) |
| <b>Weight</b>                | 507 lbs (230 kg)                                |
| <b>SS Type</b>               | 304   |
| <b>Insul. Thick.</b>         | 1.97 in (50 mm)                                 |
| <b>1/3 Size Pan Capacity</b> | 9   |
| <b>Shelf Rails Pair</b>      | 6   |
| <b>Shelf Size (W×D)</b>      | 18.11 × 25.98 in (46 × 66 cm)                   |
| <b>Cooling Gas</b>           | R290  |
| <b>Doors</b>                 | 2   |
| <b>Voltage</b>               | 115V / 60Hz / 1Ph                               |

**\$1735**



## PMS223-US

|                              |  |
|------------------------------|--|
| <b>Temperature</b>           | +33 / +41 °F (0 / +5 °C)                       |
| <b>Gross Volume</b>          | 25.43 ft <sup>3</sup> (720 L)                  |
| <b>Ext. Dim. (W×D×H)</b>     | 90.35 × 34.84 × 40.1 in<br>(229 × 89 × 103 cm) |
| <b>Pack. Dim. (W×D×H)</b>    | 93.35 × 36 × 50.1 in<br>(237 × 91 × 127 cm)    |
| <b>Weight</b>                | 749 lbs (340 kg)                               |
| <b>SS Type</b>               | 304  |
| <b>Insul. Thick.</b>         | 1.97 in (50 mm)                                |
| <b>1/3 Size Pan Capacity</b> | 12   |
| <b>Shelf Rails Pair</b>      | 9  |
| <b>Shelf Size (W×D)</b>      | 18.11 × 25.98 in (46 × 66 cm)                  |
| <b>Cooling Gas</b>           | R290   |
| <b>Doors</b>                 | 3  |
| <b>Voltage</b>               | 115V / 60Hz / 1Ph                              |

**\$2105**



# COCKTAIL REFRIGERATOR

## INFO


Frenox cocktail refrigerators combine all the essentials of a professional bar into one compact and functional unit. Featuring an integrated sink with faucet and glass washer, they ensure fast and hygienic service during peak hours. The dedicated blender space with a built-in electrical socket adds both safety and convenience, making preparation smooth and efficient.

With an interior depth of 16.9 in (43 cm) and GN 1/1 capacity, these models provide generous storage while keeping beverages perfectly chilled through a powerful fan cooling system and automatic resistance defrost. High-density polyurethane insulation guarantees energy savings, while a special water drainage system improves operational efficiency.


Available in 5.3 ft<sup>3</sup> (150 L) and 8.3 ft<sup>3</sup> (235 L) capacities, Frenox cocktail stations are equipped with digital control panels, adjustable stainless-steel legs, and easy-to-clean magnetic gaskets. Designed for durability and elegance, they take bar performance to the next level.



### Dimension Details:

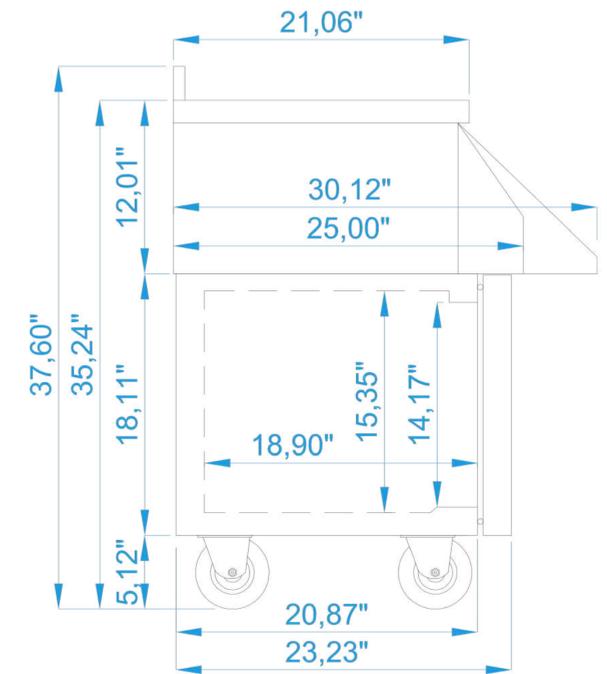

### Drawer Options:

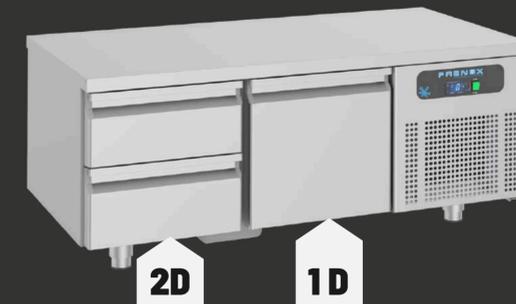

- 2D** 1/2 Drawers \$ 170
- 1D** 1 Drawers \$ 120



frenox.com



**CKT2-US**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                        |
| <b>Volume</b>            | 5.30 ft <sup>3</sup> (150 L)                    |
| <b>Ext. Dim. (W×D×H)</b> | 47.24 × 23.62 × 33.46 in<br>(120 × 60 × 85 cm)  |
| <b>Pack. Dim.</b>        | 51.18 × 27.56 × 39.37 in<br>(130 × 70 × 100 cm) |
| <b>Weight</b>            | 243 lbs (110 kg)                                |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                                 |
| <b>Doors</b>             | 2   |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                               |

**\$1620**

2



**CKT3-US**

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                        |
| <b>Volume</b>            | 8.30 ft <sup>3</sup> (235 L)                    |
| <b>Ext. Dim. (W×D×H)</b> | 62.99 × 23.62 × 33.46 in<br>(160 × 60 × 85 cm)  |
| <b>Pack. Dim.</b>        | 66.93 × 27.56 × 39.37 in<br>(170 × 70 × 100 cm) |
| <b>Weight</b>            | 331 lbs (150 kg)                                |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                                 |
| <b>Doors</b>             | 3   |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                               |

**\$1899**



# DRY AGE SERIES

## INFO

Frenox Dry Age series offers professional solutions for the controlled maturation of meat.

The single-door model DR4 provides high efficiency in compact spaces, while the double-door DR10 model is ideal for large-scale operations with its wide capacity and powerful cooling system.

All models are equipped with a precise temperature and humidity control system, ensuring that the meat's texture, color, and aroma are preserved throughout the aging process under optimal conditions. The heated glass doors, LED lighting, and stainless steel interior provide both hygiene and an elegant presentation.

In addition, the automatic defrost system and hot gas evaporation technology ensure ease of use and energy efficiency. The Frenox Dry Age Series elevates the meat aging process to a controlled, reliable, and truly professional standard.



Humidity Control

Special Heated Glass

304 SS Shelves

Meat Bar

DR4



frenox.com



## DR4-SY-US

|                          |  |
|--------------------------|--|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                       |
| <b>Humidity (RH)</b>     | 65% - 85%                                      |
| <b>Volume</b>            | 21.19 ft <sup>3</sup> (600 L)                  |
| <b>Ext. Dim. (W×D×H)</b> | 25.59 × 23.62 × 70.87 in<br>(65 × 60 × 180 cm) |
| <b>Pack. Dim.</b>        | 27.56 × 25.59 × 74.80 in<br>(70 × 65 × 190 cm) |
| <b>Weight</b>            | 282 lbs (128 kg)                               |
| <b>SS Type</b>           | 316  |
| <b>Insul. Thick.</b>     | 2.36 in (60 mm)                                |
| <b>Shelves</b>           | 5  |
| <b>Cooling Gas</b>       | R290   |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                              |

**\$3938**



# BOTTLE COOLERS

## INFO



Frenox bottle coolers combine durability and style for busy bar environments. Built with a black PVC-coated galvanized steel body and stainless-steel interior, they ensure long-lasting use and a modern look. High-density polyurethane insulation with a fan cooling system keeps beverages perfectly chilled, while the digital thermostat and automatic defrost provide reliable performance.

With gross capacities ranging from 4.9 ft<sup>3</sup> (140 L) to 24.0 ft<sup>3</sup> (680 L), these models adapt to different storage needs. Offering 4 to 8 shelf options and available with drawer or glass door configurations, they provide flexible and efficient organization.


Even at ambient temperatures up to 89.6 °F (+32 °C), Frenox bottle coolers deliver consistent performance—making them the ideal choice for bars that demand both reliability and elegance.



Dimension Details:

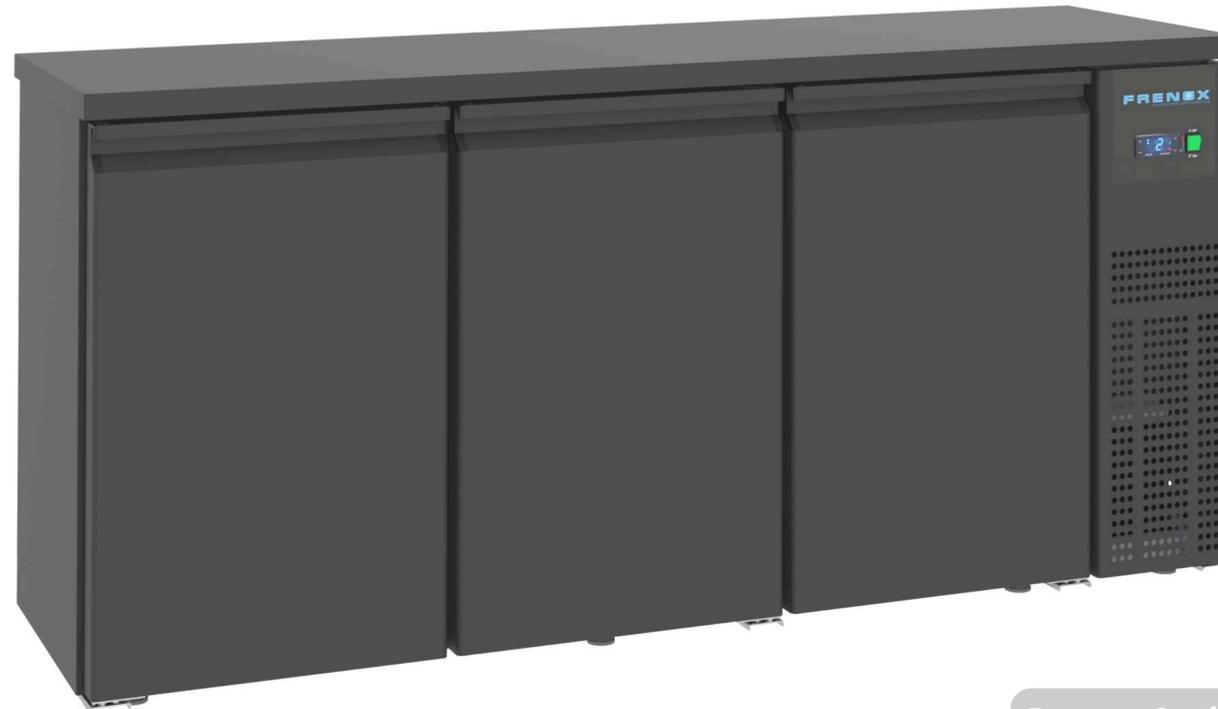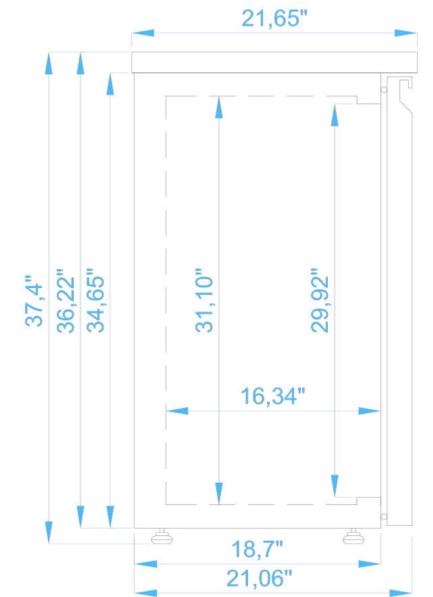

Drawer Options:

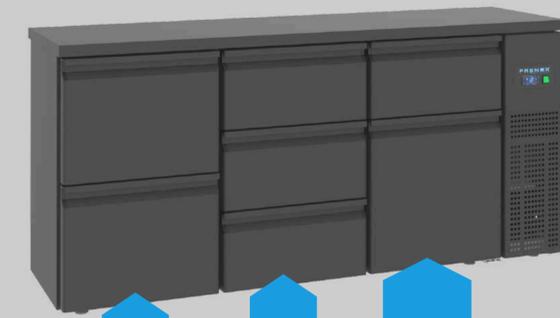

- 2D** 1/2 Drawers \$ 170
- 3D** 1/3 Drawers \$ 210
- 2/3D** 2/3 Drawers \$ 190





## SSN1-C-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                    |
| Volume            | 4.9 ft <sup>3</sup> (140 L)                 |
| Ext. Dim. (W×D×H) | 44.49 × 21.65 × 37.40 in<br>(113×55×95 cm)  |
| Pack. Dim.        | 48.43 × 25.59 × 43.31 in<br>(123×65×110 cm) |
| Weight            | 308.6 lbs (140 kg)                          |
| SS Type           | Outside: Black / Inside: 430                |
| Insul. Thick.     | 2.36 in (60 mm)                             |
| Shelves           | 2   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$ 946**



## SSN2-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                    |
| Volume            | 11.3 ft <sup>3</sup> (320 L)                |
| Ext. Dim. (W×D×H) | 54.33 × 21.65 × 37.40 in<br>(138×55×95 cm)  |
| Pack. Dim.        | 58.27 × 25.59 × 43.31 in<br>(148×65×110 cm) |
| Weight            | 330.7 lbs (150 kg)                          |
| SS Type           | Outside: Black / Inside: 430                |
| Insul. Thick.     | 2.36 in (60 mm)                             |
| Shelves           | 4   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$ 1101**



## SSN3-US

|                   |   |
|-------------------|---|
| Temperature       | +33 / +41 °F (0 / +5 °C)                    |
| Volume            | 17.7 ft <sup>3</sup> (500 L)                |
| Ext. Dim. (W×D×H) | 76.38 × 21.65 × 37.40 in<br>(194×55×95 cm)  |
| Pack. Dim.        | 80.31 × 25.59 × 43.31 in<br>(204×65×110 cm) |
| Weight            | 352.7 lbs (160 kg)                          |
| SS Type           | Outside: Black / Inside: 430                |
| Insul. Thick.     | 2.36 in (60 mm)                             |
| Shelves           | 6   |
| Cooling Gas       | R290  |
| Voltage           | 115V / 60Hz / 1Ph                           |

**\$ 1365**



## SSN4-US

|                   |  |
|-------------------|--|
| Temperature       | +33 / +41 °F (0 / +5 °C)                     |
| Volume            | 24 ft <sup>3</sup> (680 L)                   |
| Ext. Dim. (W×D×H) | 98.03 × 21.65 × 37.40 in<br>(249×55×95 cm)   |
| Pack. Dim.        | 101.97 × 25.59 × 43.31 in<br>(259×65×110 cm) |
| Weight            | 396.8 lbs (180 kg)                           |
| SS Type           | Outside: Black / Inside: 430                 |
| Insul. Thick.     | 2.36 in (60 mm)                              |
| Shelves           | 8  |
| Cooling Gas       | R290   |
| Voltage           | 115V / 60Hz / 1Ph                            |

**\$ 1493**




# KEG COOLERS

## INFO


Frenox keg coolers are designed to deliver professional solutions for bars and restaurants that require speed, reliability, and style. With a sleek black PVC-coated galvanized steel body and stainless-steel interior, they combine durability with modern aesthetics. A powerful fan cooling system, digital thermometer, and automatic defrost keep beverages at the perfect temperature at all times.

The series offers models with capacities for 1, 2, 3, or 4 kegs, ranging from 3.9 ft<sup>3</sup> (111 L) to 9.4 ft<sup>3</sup> (265 L) gross volume. High-density polyurethane insulation ensures energy efficiency, while adjustable stainless-steel legs and removable magnetic gaskets make cleaning and use effortless. Optional drawer or glass door configurations further enhance flexibility.


Even in ambient conditions up to 89.6 °F (+32 °C), Frenox keg coolers deliver consistent performance. With generous storage capacity and a functional design, they guarantee uninterrupted beverage service in any busy bar environment.

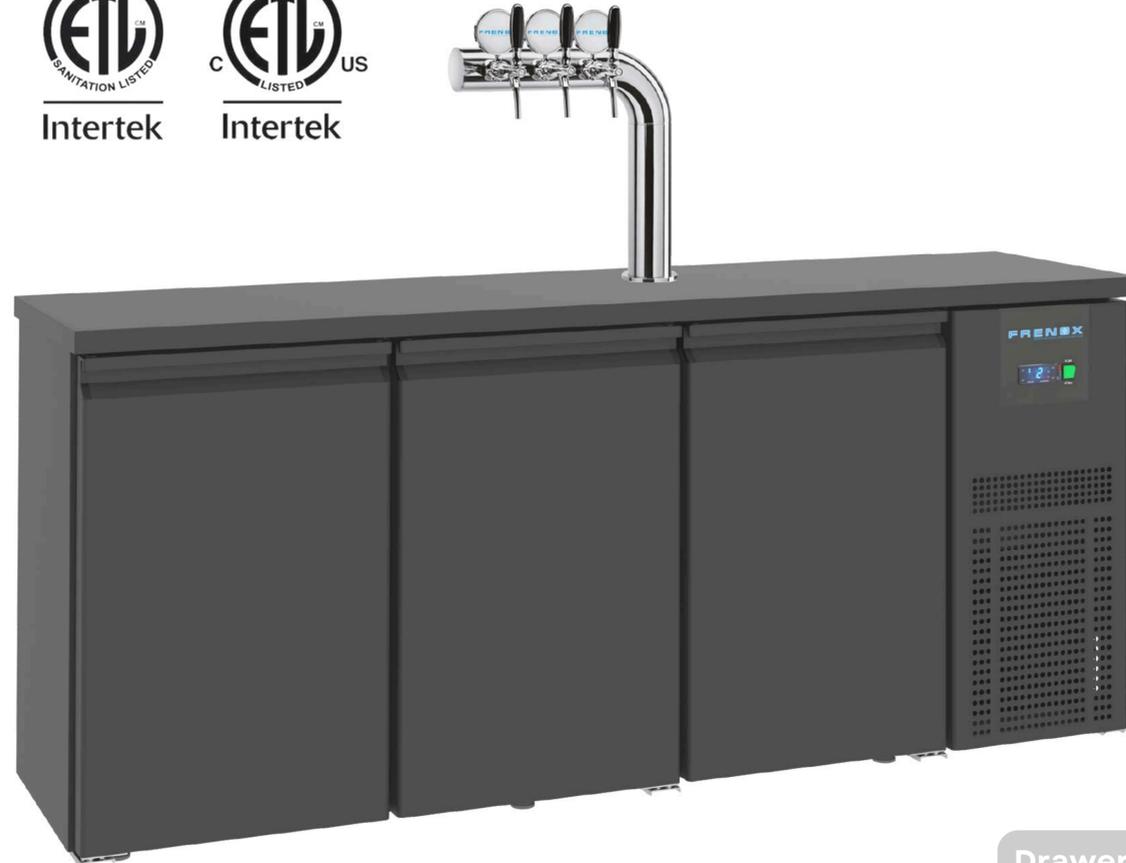

### Dimension Details:

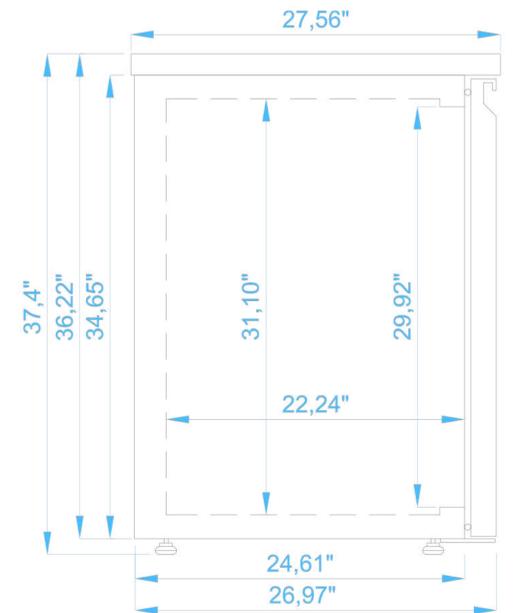

### Drawer Options:

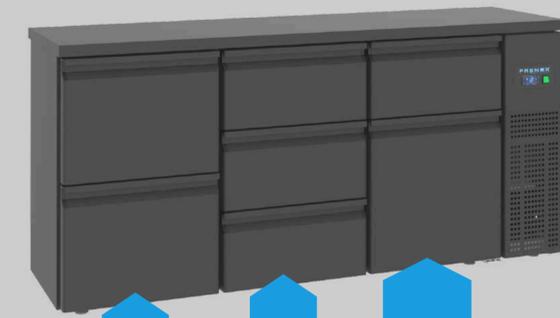

- 2D** 1/2 Drawers \$187
- 3D** 1/3 Drawers \$227
- 2/3D** 2/3 Drawers \$207

\*The beer tower is not included



frenox.com





## SGN2-US

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                    |
| <b>Keg Capacity</b>      | 2 Keg                                       |
| <b>Ext. Dim. (W×D×H)</b> | 61.02 × 27.56 × 37.80 in<br>(155×70×96 cm)  |
| <b>Pack. Dim.</b>        | 64.96 × 31.50 × 43.31 in<br>(165×80×110 cm) |
| <b>Weight</b>            | 352.7 lbs (160 kg)                          |
| <b>SS Type</b>           | Outside: Black / Inside: 430                |
| <b>Insul. Thick.</b>     | 2.36 in (60 mm)                             |
| <b>Shelves</b>           | 4   |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

**\$ 1016**



## SGN3-US

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                    |
| <b>Keg Capacity</b>      | 3 Keg                                       |
| <b>Ext. Dim. (W×D×H)</b> | 81.89 × 27.56 × 37.80 in<br>(208×70×96 cm)  |
| <b>Pack. Dim.</b>        | 85.83 × 31.50 × 43.31 in<br>(218×80×110 cm) |
| <b>Weight</b>            | 407.9 lbs (185 kg)                          |
| <b>SS Type</b>           | Outside: Black / Inside: 430                |
| <b>Insul. Thick.</b>     | 2.36 in (60 mm)                             |
| <b>Shelves</b>           | 6   |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

**\$ 1115**



## SGN4-US

|                          |  |
|--------------------------|--|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                     |
| <b>Keg Capacity</b>      | 4 Keg  |
| <b>Ext. Dim. (W×D×H)</b> | 104.33 × 27.56 × 37.80 in<br>(265×70×96 cm)  |
| <b>Pack. Dim.</b>        | 108.27 × 31.50 × 43.31 in<br>(275×80×110 cm) |
| <b>Weight</b>            | 463 lbs (210 kg)                             |
| <b>SS Type</b>           | Outside: Black / Inside: 430                 |
| <b>Insul. Thick.</b>     | 2.36 in (60 mm)                              |
| <b>Shelves</b>           | 8  |
| <b>Cooling Gas</b>       | R290   |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                            |

**\$ 1415**



# UNDERCOUNTER REFRIGERATORS & FREEZERS 70



## INFO


Frenox undercounter refrigerators combine compact design with professional performance. Powered by eco-friendly R290 refrigerant and operating on 115V / 60Hz, they deliver efficient and sustainable cooling.

With 1.97 in (50 mm) high-density insulation, they ensure energy savings and stable performance, while removable magnetic gaskets, self-closing spring hinges, and height-adjustable stainless steel legs provide hygiene and ease of use.


In addition to door options, drawer configurations add flexibility for different service needs. A durable stainless steel body, automatic defrost system, and digital control panel make them a reliable and long-lasting solution.



### Dimension Details:

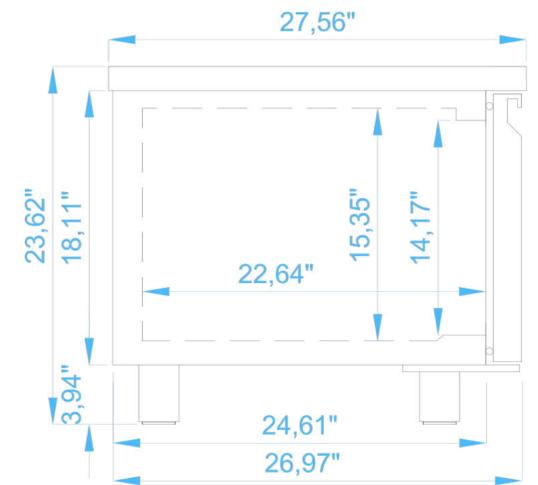

### Drawer Options:

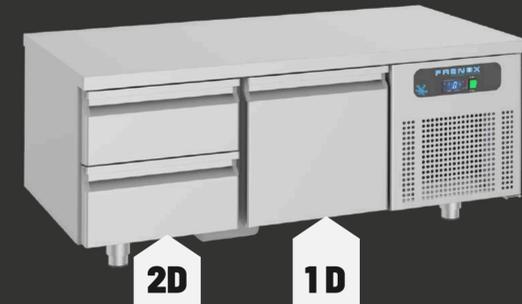

**2D** 1/2 Drawers





\$ 170

**1D** 1 Drawers

\$ 120



frenox.com

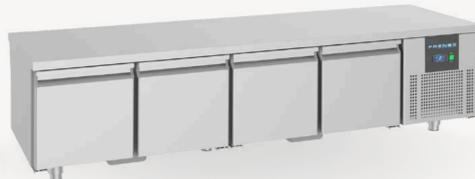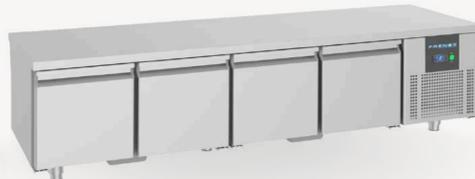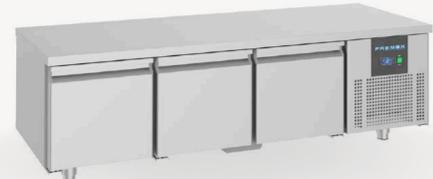

## UGN2-US

## UGN3-US

## UGN4-US

## UGL2-US

## UGL3-US

## UGL4-US

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                    |
| <b>Volume</b>            | 6.36 ft <sup>3</sup> (180 L)                |
| <b>Ext. Dim. (W×D×H)</b> | 55.12 x 27.56 x 23.62 in (140 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 59.06 x 29.53 x 27.56 in (150 x 75 x 70 cm) |
| <b>Weight</b>            | 264.55 lbs (120 kg)                         |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                             |
| <b>Door</b>              | 2   |
| <b>Shelves</b>           | 2   |
| <b>Shelf Size (W×D)</b>  | 20.87 x 16.93 in (53 x 43 cm, GN 1/1)       |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                      |
| <b>Volume</b>            | 9.89 ft <sup>3</sup> (280 L)                  |
| <b>Ext. Dim. (W×D×H)</b> | 73.43 x 27.56 x 23.62 in (186.5 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 76.38 x 30.31 x 27.56 in (194 x 77 x 70 cm)   |
| <b>Weight</b>            | 353 lbs (160 kg)                              |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                               |
| <b>Door</b>              | 3   |
| <b>Shelves</b>           | 3   |
| <b>Shelf Size (W×D)</b>  | 20.87 x 16.93 in (53 x 43 cm, GN1/1)          |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                             |

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | +33 / +41 °F (0 / +5 °C)                    |
| <b>Volume</b>            | 12.71 ft <sup>3</sup> (360 L)               |
| <b>Ext. Dim. (W×D×H)</b> | 91.73 x 27.56 x 23.62 in (233 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 94.49 x 29.53 x 27.56 in (240 x 75 x 70 cm) |
| <b>Weight</b>            | 407.85 lbs (185 kg)                         |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                             |
| <b>Door</b>              | 4   |
| <b>Shelves</b>           | 4   |
| <b>Shelf Size (W×D)</b>  | 18.11 x 25.98 in (46 x 66 cm, GN1/1)        |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | -10 / 0 °F (-23 / -18 °C)                   |
| <b>Volume</b>            | 6.36 ft <sup>3</sup> (180 L)                |
| <b>Ext. Dim. (W×D×H)</b> | 55.12 x 27.56 x 23.62 in (140 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 59.06 x 29.53 x 27.56 in (150 x 75 x 70 cm) |
| <b>Weight</b>            | 275 lbs (125 kg)                            |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                             |
| <b>Door</b>              | 2   |
| <b>Shelves</b>           | 2   |
| <b>Shelf Size (W×D)</b>  | 20.87 x 16.93 in (53 x 43 cm, GN 1/1)       |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | -10 / 0 °F (-23 / -18 °C)                     |
| <b>Volume</b>            | 9.89 ft <sup>3</sup> (280 L)                  |
| <b>Ext. Dim. (W×D×H)</b> | 73.43 x 27.56 x 23.62 in (186.5 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 76.38 x 30.31 x 27.56 in (194 x 77 x 70 cm)   |
| <b>Weight</b>            | 364 lbs (165 kg)                              |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                               |
| <b>Door</b>              | 3   |
| <b>Shelves</b>           | 3   |
| <b>Shelf Size (W×D)</b>  | 20.87 x 16.93 in (53 x 43 cm, GN1/1)          |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                             |

|                          |   |
|--------------------------|---|
| <b>Temperature</b>       | -10 / 0 °F (-23 / -18 °C)                   |
| <b>Volume</b>            | 12.71 ft <sup>3</sup> (360 L)               |
| <b>Ext. Dim. (W×D×H)</b> | 91.73 x 27.56 x 23.62 in (233 x 70 x 60 cm) |
| <b>Pack. Dim.</b>        | 94.49 x 29.53 x 27.56 in (240 x 75 x 70 cm) |
| <b>Weight</b>            | 429 lbs (195 kg)                            |
| <b>SS Type</b>           | 304   |
| <b>Insul. Thick.</b>     | 1.97 in (50 mm)                             |
| <b>Door</b>              | 4   |
| <b>Shelves</b>           | 4   |
| <b>Shelf Size (W×D)</b>  | 18.11 x 25.98 in (46 x 66 cm, GN1/1)        |
| <b>Cooling Gas</b>       | R290  |
| <b>Voltage</b>           | 115V / 60Hz / 1Ph                           |

**\$1014**

**\$1105**

**\$1384**

**\$1094**

**\$1181**

**\$1439**



# UNDERCOUNTER REFRIGERATORS & FREEZERS 60

## INFO


Frenox undercounter refrigerators combine compact design with professional performance. Powered by eco-friendly R290 refrigerant and operating on 115V / 60Hz, they deliver efficient and sustainable cooling.

With 1.97 in (50 mm) high-density insulation, they ensure energy savings and stable performance, while removable magnetic gaskets, self-closing spring hinges, and height-adjustable stainless steel legs provide hygiene and ease of use.


In addition to door options, drawer configurations add flexibility for different service needs. A durable stainless steel body, automatic defrost system, and digital control panel make them a reliable and long-lasting solution.



### Dimension Details:

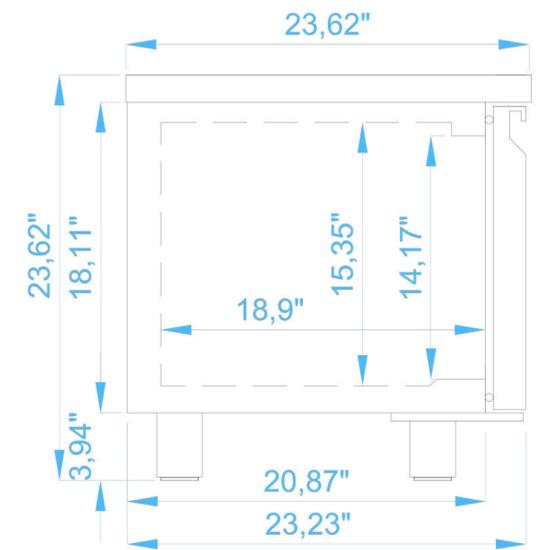




### Drawer Options:

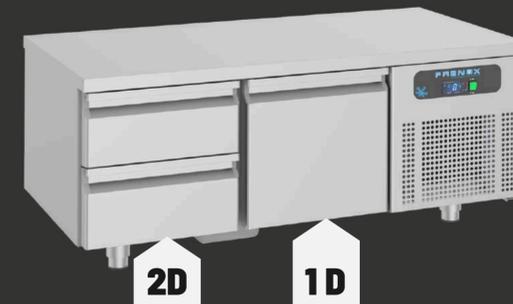

- 2D** 1/2 Drawers \$ 170
- 1D** 1 Drawers \$ 120




frenox.com

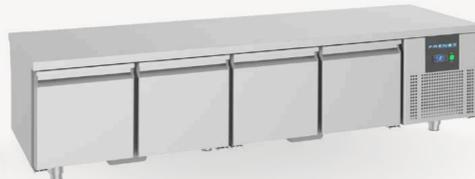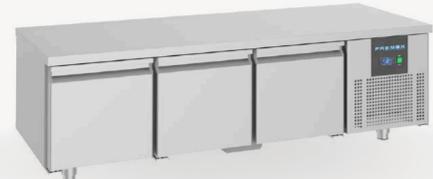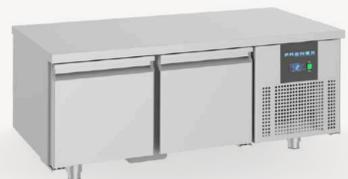

Freezer



Freezer

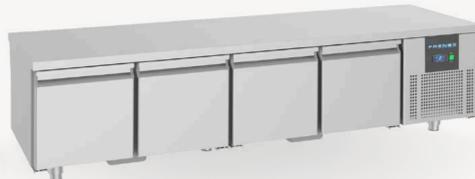

Freezer

## USN2-US

## USN3-US

## USN4-US

## USL2-US

## USL3-US

## USL4-US

|                   |                                       |
|-------------------|---------------------------------------|
| Temperature       | +33 / +41 °F (0 / +5 °C)              |
| Volume            | 5.3 ft <sup>3</sup> (150 L)           |
| Ext. Dim. (W×D×H) | 55.12×23.62×23.62 in (140×60×60 cm)   |
| Pack. Dim.        | 59.06×27.56×29.53 in (150×70×75 cm)   |
| Weight            | 243 lbs (110 kg)                      |
| SS Type           | 304                                   |
| Insul. Thick.     | 1.97 in (50 mm)                       |
| Door              | 2                                     |
| Shelves           | 2                                     |
| Shelf Size (W×D)  | 20.87 x 16.93 in (53 x 43 cm, GN 1/1) |
| Cooling Gas       | R290                                  |
| Voltage           | 115V / 60Hz / 1Ph                     |

|                   |                                       |
|-------------------|---------------------------------------|
| Temperature       | +33 / +41 °F (0 / +5 °C)              |
| Volume            | 8.3 ft <sup>3</sup> (235 L)           |
| Ext. Dim. (W×D×H) | 73.43×23.62×23.62 in (186.5×60×60 cm) |
| Pack. Dim.        | 77.56×27.56×29.53 in (197×70×75 cm)   |
| Weight            | 331 lbs (150 kg)                      |
| SS Type           | 304                                   |
| Insul. Thick.     | 1.97 in (50 mm)                       |
| Door              | 3                                     |
| Shelves           | 3                                     |
| Shelf Size (W×D)  | 20.87 x 16.93 in (53 x 43 cm, GN1/1)  |
| Cooling Gas       | R290                                  |
| Voltage           | 115V / 60Hz / 1Ph                     |

|                   |                                      |
|-------------------|--------------------------------------|
| Temperature       | +33 / +41 °F (0 / +5 °C)             |
| Volume            | 335 L (11.8 ft <sup>3</sup> )        |
| Ext. Dim. (W×D×H) | 104.33×23.62×23.62 in (265×60×60 cm) |
| Pack. Dim.        | 108.27×27.56×29.53 in (275×70×75 cm) |
| Weight            | 419 lbs (190 kg)                     |
| SS Type           | 304                                  |
| Insul. Thick.     | 1.97 in (50 mm)                      |
| Door              | 4                                    |
| Shelves           | 4                                    |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm, GN1/1) |
| Cooling Gas       | R290                                 |
| Voltage           | 115V / 60Hz / 1Ph                    |

|                   |                                       |
|-------------------|---------------------------------------|
| Temperature       | -10 / 0 °F (-23 / -18 °C)             |
| Volume            | 5.5 ft <sup>3</sup> (155 L)           |
| Ext. Dim. (W×D×H) | 47.24×23.62×23.62 in (120×60×60 cm)   |
| Pack. Dim.        | 51.18×27.56×29.53 in (130×70×75 cm)   |
| Weight            | 234 lbs (106 kg)                      |
| SS Type           | 304                                   |
| Insul. Thick.     | 1.97 in (50 mm)                       |
| Door              | 2                                     |
| Shelves           | 2                                     |
| Shelf Size (W×D)  | 20.87 x 16.93 in (53 x 43 cm, GN 1/1) |
| Cooling Gas       | R290                                  |
| Voltage           | 115V / 60Hz / 1Ph                     |

|                   |                                      |
|-------------------|--------------------------------------|
| Temperature       | -10 / 0 °F (-23 / -18 °C)            |
| Volume            | 8.5 ft <sup>3</sup> (240 L)          |
| Ext. Dim. (W×D×H) | 62.99×23.62×23.62 in (160×60×60 cm)  |
| Pack. Dim.        | 66.93×27.56×29.53 in (170×70×75 cm)  |
| Weight            | 306 lbs (139 kg)                     |
| SS Type           | 304                                  |
| Insul. Thick.     | 1.97 in (50 mm)                      |
| Door              | 3                                    |
| Shelves           | 3                                    |
| Shelf Size (W×D)  | 20.87 x 16.93 in (53 x 43 cm, GN1/1) |
| Cooling Gas       | R290                                 |
| Voltage           | 115V / 60Hz / 1Ph                    |

|                   |                                      |
|-------------------|--------------------------------------|
| Temperature       | -10 / 0 °F (-23 / -18 °C)            |
| Volume            | 10.8 ft <sup>3</sup> (305 L)         |
| Ext. Dim. (W×D×H) | 86.61×23.62×23.62 in (220×60×60 cm)  |
| Pack. Dim.        | 90.55×27.56×29.53 in (230×70×75 cm)  |
| Weight            | 373 lbs (169 kg)                     |
| SS Type           | 304                                  |
| Insul. Thick.     | 1.97 in (50 mm)                      |
| Door              | 4                                    |
| Shelves           | 4                                    |
| Shelf Size (W×D)  | 18.11 x 25.98 in (46 x 66 cm, GN1/1) |
| Cooling Gas       | R290                                 |
| Voltage           | 115V / 60Hz / 1Ph                    |

\$1022

\$1125

\$1431

\$1055

\$1125

\$1431



# MODULAR COLD ROOMS

## INFO

Frenox Modular Cold Rooms are engineered to meet the high performance demands of professional cold storage applications.


Featuring 100 mm (3.94 in) high-density insulated panels, these systems provide excellent thermal efficiency, helping reduce energy consumption and operating costs even in demanding environments.

Thanks to their modular construction, Frenox cold rooms can be configured in a wide range of sizes and capacities. All models are equipped with a standard net door size of 27.56 x 71.06 in (700 x 1805 mm), ensuring ergonomic access and smooth material handling.

With their robust structure, reliable temperature stability, and long service life, Frenox cold rooms are a dependable solution for hotels, restaurants, catering operations, food production facilities, logistics centers, and industrial storage areas.



### Panel Thickness

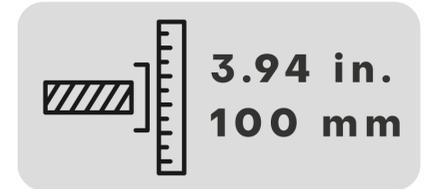

frenox.com



| Model               | Ext. Dim. (W×D×H)                             | Net Door (W×H)                  | Internal Dim. (W×D×H)                         | Internal Volume                                | Panel Thickness  | Price           |
|---------------------|---|---------------------------------|---|--|------------------|-----------------|
| <b>CG1512201-US</b> | 59.06×47.24×79.13 in<br>(1500×1200×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×39.37×71.26 in<br>(1300×1000×1810 mm)   | 83.10 ft <sup>3</sup> (2.35 m <sup>3</sup> )   | 100 mm (3.94 in) | <b>\$ 1,137</b> |
| <b>CG1515201-US</b> | 59.06×59.06×79.13 in<br>(1500×1500×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×51.18×71.26 in<br>(1300×1300×1810 mm)   | 108.01 ft <sup>3</sup> (3.06 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,269</b> |
| <b>CG1518201-US</b> | 59.06×70.87×79.13 in<br>(1500×1800×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×62.99×71.26 in<br>(1300×1600×1810 mm)   | 132.95 ft <sup>3</sup> (3.76 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,438</b> |
| <b>CG1818201-US</b> | 70.87×70.87×79.13 in<br>(1800×1800×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 62.99×62.99×71.26 in<br>(1600×1600×1810 mm)   | 163.65 ft <sup>3</sup> (4.63 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,446</b> |
| <b>CG1821201-US</b> | 70.87×82.68×79.13 in<br>(1800×2100×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 62.99×74.80×71.26 in<br>(1600×1900×1810 mm)   | 194.36 ft <sup>3</sup> (5.50 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,581</b> |
| <b>CG2115201-US</b> | 82.68×59.06×79.13 in<br>(2100×1500×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×51.18×71.26 in<br>(1900×1300×1810 mm)   | 158.05 ft <sup>3</sup> (4.47 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,482</b> |
| <b>CG2121201-US</b> | 82.68×82.68×79.13 in<br>(2100×2100×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×74.80×71.26 in<br>(1900×1900×1810 mm)   | 230.80 ft <sup>3</sup> (6.54 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,766</b> |
| <b>CG2124201-US</b> | 82.68×94.49×79.13 in<br>(2100×2400×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×86.61×71.26 in<br>(1900×2200×1810 mm)   | 267.21 ft <sup>3</sup> (7.57 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,956</b> |
| <b>CG2424201-US</b> | 94.49×94.49×79.13 in<br>(2400×2400×2010 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 86.61×86.61×71.26 in<br>(2200×2200×1810 mm)   | 309.32 ft <sup>3</sup> (8.76 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 2,066</b> |
| <b>CG2427201-US</b> | 94.49×106.30×79.13 in<br>(2400×2700×2010 mm)  | 27.56×71.06 in<br>(700×1805 mm) | 86.61×98.43×71.26 in<br>(2200×2500×1810 mm)   | 351.96 ft <sup>3</sup> (9.97 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 2,288</b> |
| <b>CG2430201-US</b> | 94.49×118.11×79.13 in<br>(2400×3000×2010 mm)  | 27.56×71.06 in<br>(700×1805 mm) | 86.61×110.24×71.26 in<br>(2200×2800×1810 mm)  | 386.65 ft <sup>3</sup> (10.95 m <sup>3</sup> ) | 100 mm (3.94 in) | <b>\$ 2,451</b> |
| <b>CG3030201-US</b> | 118.11×118.11×79.13 in<br>(3000×3000×2010 mm) | 27.56×71.06 in<br>(700×1805 mm) | 110.24×110.24×71.26 in<br>(2800×2800×1810 mm) | 506.91 ft <sup>3</sup> (14.35 m <sup>3</sup> ) | 100 mm (3.94 in) | <b>\$ 3,150</b> |

| Model               | Ext. Dim. (W×D×H)                             | Net Door (W×H)                  | Internal Dim. (W×D×H)                         | Internal Volume                                | Panel Thickness  | Price           |
|---------------------|---|---------------------------------|---|--|------------------|-----------------|
| <b>CG1512220-US</b> | 59.06×47.24×86.61 in<br>(1500×1200×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×39.37×78.74 in<br>(1300×1000×2000 mm)   | 91.84 ft <sup>3</sup> (2.60 m <sup>3</sup> )   | 100 mm (3.94 in) | <b>\$ 1,238</b> |
| <b>CG1515220-US</b> | 59.06×59.06×86.61 in<br>(1500×1500×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×51.18×78.74 in<br>(1300×1300×2000 mm)   | 119.36 ft <sup>3</sup> (3.38 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,414</b> |
| <b>CG1518220-US</b> | 59.06×70.87×86.61 in<br>(1500×1800×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 51.18×62.99×78.74 in<br>(1300×1600×2000 mm)   | 146.91 ft <sup>3</sup> (4.16 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,512</b> |
| <b>CG1818220-US</b> | 70.87×70.87×86.61 in<br>(1800×1800×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 62.99×62.99×78.74 in<br>(1600×1600×2000 mm)   | 180.81 ft <sup>3</sup> (5.12 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,698</b> |
| <b>CG1821220-US</b> | 70.87×82.68×86.61 in<br>(1800×2100×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 62.99×74.80×78.74 in<br>(1600×1900×2000 mm)   | 214.71 ft <sup>3</sup> (6.08 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,801</b> |
| <b>CG2115220-US</b> | 82.68×59.06×86.61 in<br>(2100×1500×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×51.18×78.74 in<br>(1900×1300×2000 mm)   | 174.64 ft <sup>3</sup> (4.94 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,705</b> |
| <b>CG2121220-US</b> | 82.68×82.68×86.61 in<br>(2100×2100×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×74.80×78.74 in<br>(1900×1900×2000 mm)   | 254.97 ft <sup>3</sup> (7.22 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 1,986</b> |
| <b>CG2124220-US</b> | 82.68×94.49×86.61 in<br>(2100×2400×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 74.80×86.61×78.74 in<br>(1900×2200×2000 mm)   | 295.23 ft <sup>3</sup> (8.36 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 2,175</b> |
| <b>CG2424220-US</b> | 94.49×94.49×86.61 in<br>(2400×2400×2200 mm)   | 27.56×71.06 in<br>(700×1805 mm) | 86.61×86.61×78.74 in<br>(2200×2200×2000 mm)   | 341.79 ft <sup>3</sup> (9.68 m <sup>3</sup> )  | 100 mm (3.94 in) | <b>\$ 2,249</b> |
| <b>CG2427220-US</b> | 94.49×106.30×86.61 in<br>(2400×2700×2200 mm)  | 27.56×71.06 in<br>(700×1805 mm) | 86.61×98.43×78.74 in<br>(2200×2500×2000 mm)   | 388.46 ft <sup>3</sup> (11.00 m <sup>3</sup> ) | 100 mm (3.94 in) | <b>\$ 2,476</b> |
| <b>CG2430220-US</b> | 94.49×118.11×86.61 in<br>(2400×3000×2200 mm)  | 27.56×71.06 in<br>(700×1805 mm) | 86.61×110.24×78.74 in<br>(2200×2800×2000 mm)  | 427.24 ft <sup>3</sup> (12.10 m <sup>3</sup> ) | 100 mm (3.94 in) | <b>\$ 2,748</b> |
| <b>CG3030220-US</b> | 118.11×118.11×86.61 in<br>(3000×3000×2200 mm) | 27.56×71.06 in<br>(700×1805 mm) | 110.24×110.24×78.74 in<br>(2800×2800×2000 mm) | 559.57 ft <sup>3</sup> (15.85 m <sup>3</sup> ) | 100 mm (3.94 in) | <b>\$ 3,242</b> |

WITH OVER 700+ PRODUCTS

# Leader of Professional Refrigeration





**FRENOX**  
PROFESSIONAL REFRIGERATION

**84+ Countries,  
450+ Business Partners  
700+ Products**

[www.frenox.com](http://www.frenox.com)



SCAN THE QR CODE TO  
VIEW OUR PRODUCT  
CATALOGUE

**FRENOX**  
PROFESSIONAL REFRIGERATION

[www.frenox.com](http://www.frenox.com)